



VIBRO RIPPER


Vibro-Ripper is one of excavator attachment. Its excellent performance is from high frequency vibration. It leads even surrounding material's cracks. Its outstanding performance could not even compare with hydraulic breaker and it will be achieved more efficient works.

The most excellent thing is faster than traditional hydraulic breaker around 3 to 5 times with lower noise under 90db. The tooth that made wear-resistant steel will save maintenance costs as much as possible. A variety of tasks including underwater work will be great help to increase at competition.



■ PRODUCTIVITY

- Working performance improved that Approx. 4.5 times faster than hydraulic breaker.
- The minimum noise is a good advantage, it makes environment free from pollution and issue.

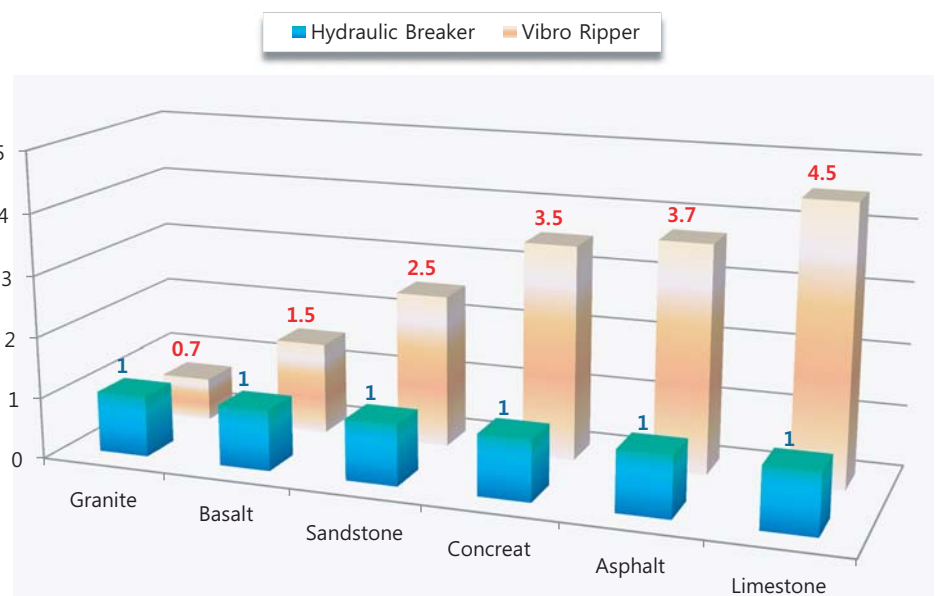

■ SPECIFICATION

Description		Unit	TVR 150	TVR 200	TVR 300	TVR 400	TVR 500
Operating Weight		kg	1500	2350	2820	4050	4800
Dimension	L	mm	1650	2150	2450	3250	3380
	W	mm	480	705	800	1050	1060
	H	mm	870	1380	1450	1870	1930
	A	mm	1050	1700	1800	2140	2255
	B	mm	800	1300	1400	1685	1785
Working Pressure		bar	180~200	200~220	240~250	240~250	240
Oil Flow		ℓ/min	100~120	170~190	180~200	190~210	200~240
Hydraulic Return Pressure		bar	6	6	6	6	6
Frequency		rpm	1500	1500	1400	1300	1250
Applicable Carrier		ton	12~16	18~24	24~33	33~45	45~55

※The specification mentioned above might be changed without prior notice for improving its quality and performance

